


SC FLEX ANGLE BOOT



SENKO's new 2.0mm and 3.0mm boot addition for the Premium SC connectors. The Flex-Angle boot is designed to bend and maintain any angle or direction from straight to 90°. The boot is molded over a single stainless steel wire and can be easily positioned by hand. The internal wire holds the boot at the desired angle or direction.



SC Flex-Angle Boot

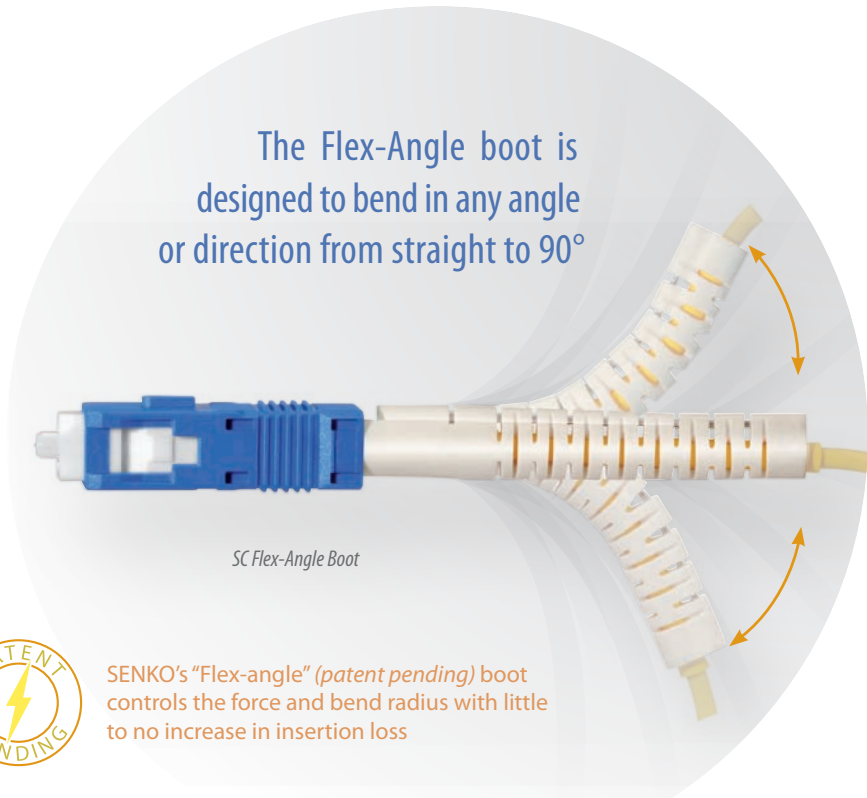







SENKO's "Flex-angle" (patent pending) boot controls the force and bend radius with little to no increase in insertion loss

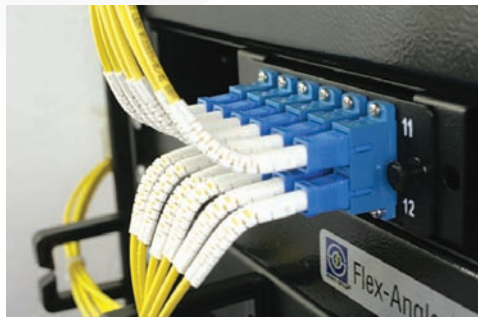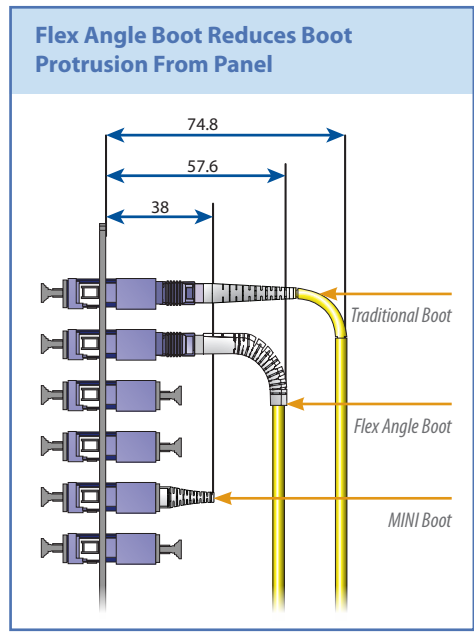




PRODUCT SERIES	BOOT	TYPE OF CONNECTOR
Premium SC 2.0mm	HW-25001-xx	254-xxx-xGx
Premium SC 3.0mm	HW-25002-xx	254-xxx-xFx
Standard SC 2.0mm	HW-25001-xx	231-xxx-xGx
Standard SC 3.0mm	HW-25002-xx	231-xxx-xFx

SC CONNECTOR BOOT OPTIONS






Premium Connector MINI Boots

Recommended for R7.5 & R15 Fiber

J MINI 900µm
HW-20015-0X

K MINI 2.0mm
HW-20016-0X

L MINI 3.0mm
HW-20017-0X

Premium Connector Long Boots






A Long 2.0mm
HW-20057-0X

7 Long 3.0mm
HW-20036-0X


Standard Boots*

Recommended for R15 & R30 Fiber

M Standard 900µm
HW-20131-0X

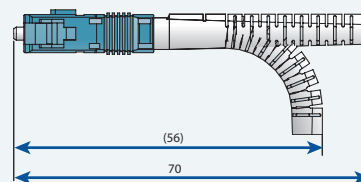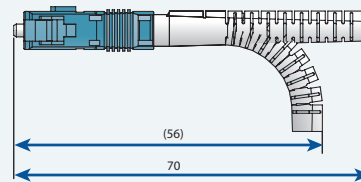N Standard 2.0mm
HW-20132-0X

P Standard 3.0mm
HW-20133-0X


*These boots are for Premium and Standard connectors

Flex Angle Boots


G 2.0mm Flex Angle Boot
HW-25001-0X

F 3.0mm Flex Angle Boot
HW-25002-0X

FEATURES COMPARISON CHART

For SC Connector Boots	BOOT PART NUMBER	BOOT ORDER CODE	R-7.5 FIBER	R-15 FIBER	R-30 FIBER
MINI Boot 900µm	HW-20015-0X	J	●	▲	
MINI Boot 2.0mm*	HW-20016-0X	K	●	▲	
MINI Boot 3.0mm	HW-20017-0X	L	●	▲	
Standard Boot 900µm	HW-20131-0X	M	●	●	▲
Standard Boot 2.0mm*	HW-20132-0X	N	●	●	▲
Standard Boot 3.0mm	HW-20133-0X	P	●	●	▲
SC Long Boot 2.0mm*	HW-20057-0X	7	●	●	●
SC Long Boot 3.0mm	HW-20036-0X	A	●	●	●
Flex Angle Boot 2.0mm*	HW-25001-0X	G	●	▲	
Flex Angle Boot 3.0mm	HW-25002-0X	F	●	▲	

BOOT TYPE		BOOT COLOR	
7	Long 3.0mm	1	Blue
A	Long 2.0mm	2	Black
M	Standard 900µm	3	Green
N	Standard 2.0mm	4	Red
P	Standard 3.0mm	6	Yellow
J	MINI 900µm	7	White
K	MINI 2.0mm	8	Beige
L	MINI 3.0mm	9	Aqua
F	Flex Angle Boot 3.0mm		
G	Flex Angle Boot 2.0mm		

CRIMP RING CODE

Premium Crimp Ring (Supplied with Premium Connector)

1.6mm Premium Crimp Ring	HW-20061
2mm Premium Crimp Ring	HW-20026
3mm Premium Crimp Ring	HW-20001

Standard Crimp Ring (Supplied with Standard Connector)

2mm Standard Crimp Ring	HW-23025
3mm Standard Crimp Ring	HW-23026

● Complies with GR-326 issue 4 TWAL test with 4 wavelength ▲ Good for general usage

* Also available in 1.6mm


Note: X=Color Code

1=Blue, 2=Black, 3= Green, 4=Red, 5=Gray, 6=Yellow, 7=White, 8=Beige

ST, FC CONNECTOR BOOT OPTIONS


ST Premium MINI Boot

Recommended for R7.5 & R15 Fiber

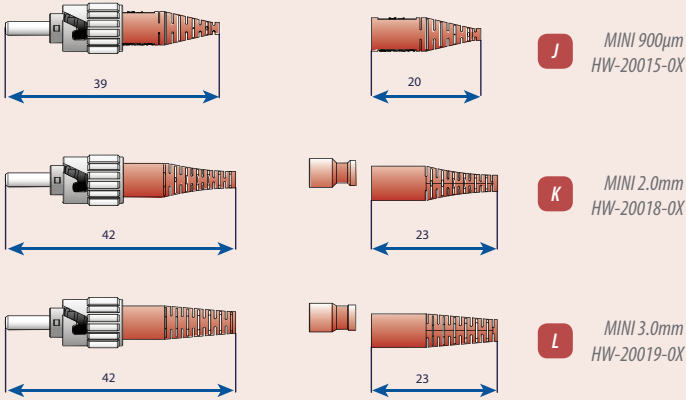


FC Premium MINI Boot

Recommended for R7.5 & R15 Fiber

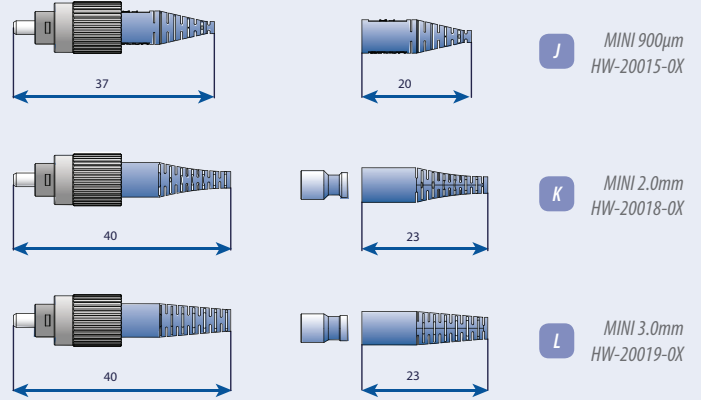

ST Premium Standard Boot


Recommended for R15 & R30 Fiber

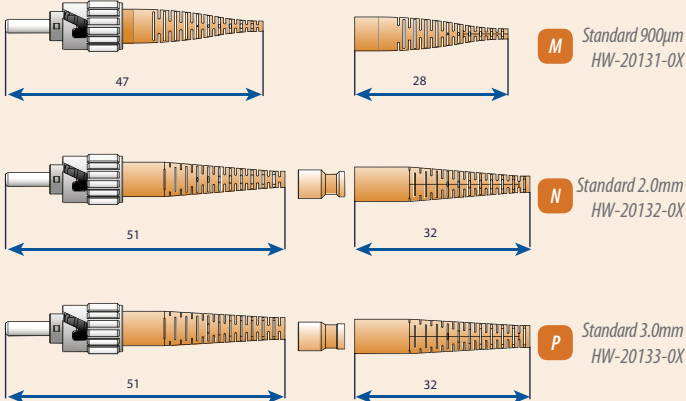

Note: These boots are for Premium and Standard Connectors


FC Premium Standard Boot

Recommended for R15 & R30 Fiber

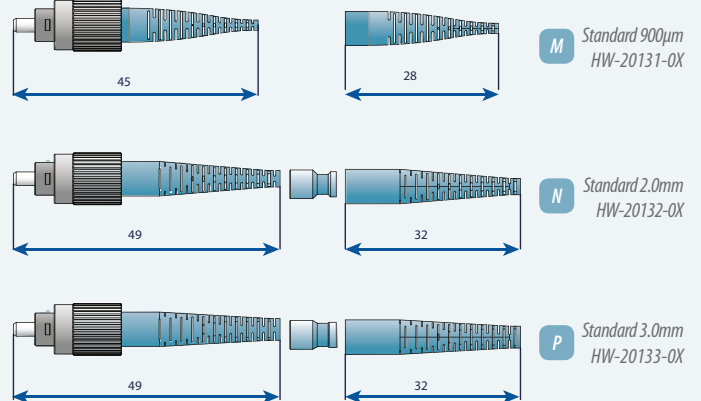


Note: These boots are for Premium and Standard Connectors

ST Premium Long Boot

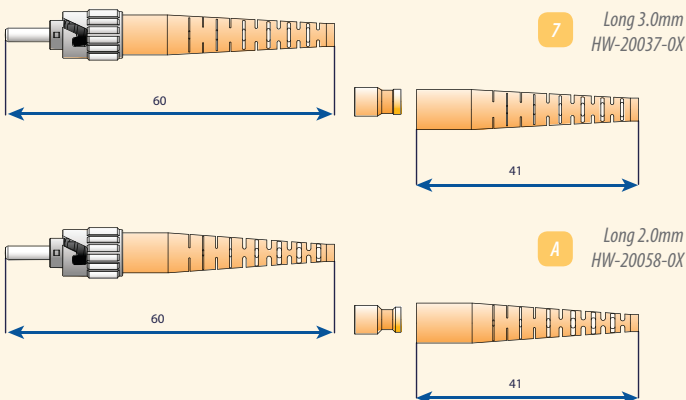

FC Premium Long Boot

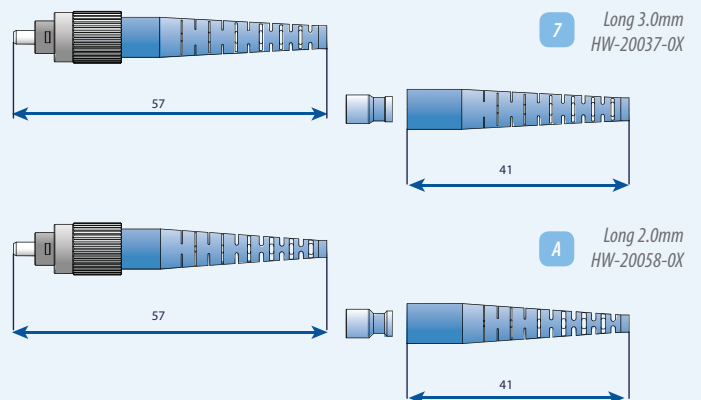

CRIMP RING CODE

Premium Crimp Ring (Comes with Premium Connector)

1.6mm Premium Crimp Ring	HW-20061
2mm Premium Crimp Ring	HW-20026
3mm Premium Crimp Ring	HW-20001

CRIMP RING CODE

Standard Crimp Ring (Comes with Standard Connector)

2mm Standard Crimp Ring	HW-23025
3mm Standard Crimp Ring	HW-23026


LC FLEX ANGLE BOOT



LC Flex-Angle Boot

SENKO's new 2.0mm and 3.0mm boot addition for the Premium LC connectors. The Flex-Angle boot is designed to bend and maintain any angle or direction from straight to 90°. The boot is molded over a single stainless steel wire and can be easily positioned by hand. The internal wire holds the boot at the desired angle or direction.

The Flex-Angle boot is designed to bend in any angle or direction from straight to 90°

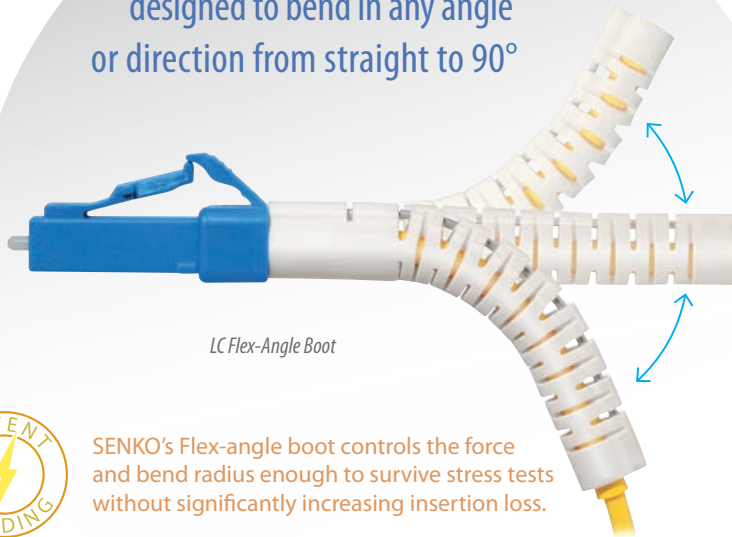


LC Flex-Angle Boot




SENKO's Flex-angle boot controls the force and bend radius enough to survive stress tests without significantly increasing insertion loss.

- LC Conventional Boot
- LC MINI Boot
- LC w/Flex-Angle Boot
- LC w/90 Degree Boot
- LC w/50 Degree Boot
- LC +MINI Boot+Right Angle Clip

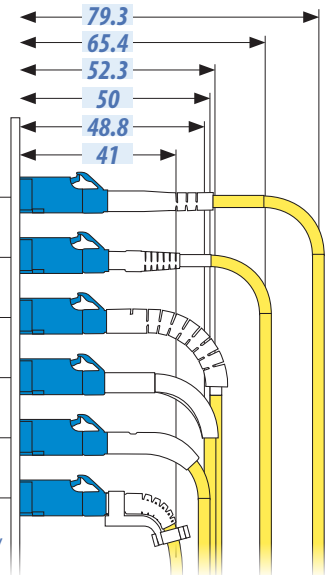

High density patch panels can be tricky to maneuver around when they are fully populated with rigid 90° boots, and the boots can interfere with a technician's access to the panel. SENKO's Flex-Angle boot allows bending in any direction and freedom of movement around other connectors. Also, removing a jumper is made easy; simply straighten out the boot and remove it without worrying about it affecting other connectors in the panel.

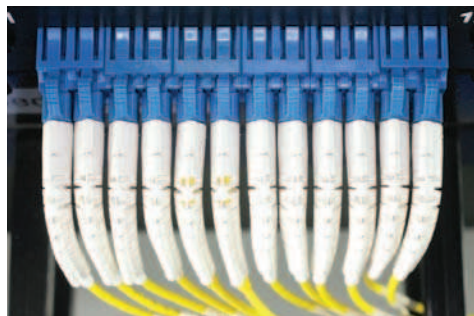

LC ANGLE BOOTS

TYPE	ITEM NUMBER
LC 50 Angle Boot	BTLC-2-50-x
LC 90 Angle Boot	BTLC-2-90-x
LC 2mm Flex Angle Boot	931-JCBF-x
LC 3mm Flex Angle Boot	931-JCBF3-x
LC Right Angle Clip	931-CLIP-RAB-W

BTLC-2-50-X ORDER CODE example


Highlight: The Angle boots are assembled using the same termination procedure established for the 2.0mm or 3.0mm connector (same crimp ring and crimp tool), and can be used on simplex and duplex connector configurations.

- Provide fixed and flex angle positioning for better cable management
- Made of RoHS material and UL94-V0 rated type


Note: Custom configurations available upon request

LC CONNECTOR BOOT OPTIONS


Standard Connector MINI Boots



B MINI 900µm
931-MIN1-X




C MINI 2.0mm
931-MIN2-X




D MINI 3.0mm
931-MIN3-X


Unibody Connector MINI Boots



B MINI 900µm
931-UNI1-X




C MINI 2.0mm
931-MIN2-X





D MINI 3.0mm
931-MIN3-X

Standard Connector Boots




2 2.0mm Original
BTLC-2-X-ON




6 3.0mm Boot
931-JCB3-X-R




Unibody Connector Boots




4 2.0mm Round
931-JCB-X-R




6 3.0mm Boot
931-JCB3-X-R





More Boots Options



LC Switchable with MINI Boot 3.0mm
931-MIN3-X




1 BTW Boot
931-BTWB-X




5 2.0mm Short Boot
931-JCBS-X



Flex Angle Boots

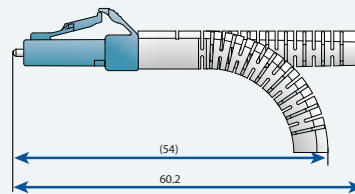

7 2.0mm Flex Angle Boot
931-JCBF-X

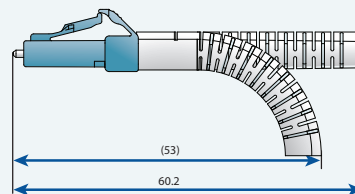

9 3.0mm Flex Angle Boot
931-JCBF3-X

Note: X=Color Code
W=White, G=Green, L=Blue, B=Black, A=Aqua, R=Red