

DATASHEET

USB3.0 Connection Cable Type A Plug to Type A Plug, Premium, black



USB3.0 PREMIUM



Description

For data transmission rates up to 5 Gbit/s. Wire construction: AWG30 / AWG20. Shielding: Foil + 80% braiding. Plug moulded.


General data

Type of connector connection 1	USB-A
Number of poles connection 1	9
Connection type connection 1	Plug
Type of connector connection 2	USB-A
Number of poles connection 2	9
Connection type connection 2	Plug

DATASHEET

USB3.0 Connection Cable Type A Plug to Type A Plug, Premium, black

Technical drawings

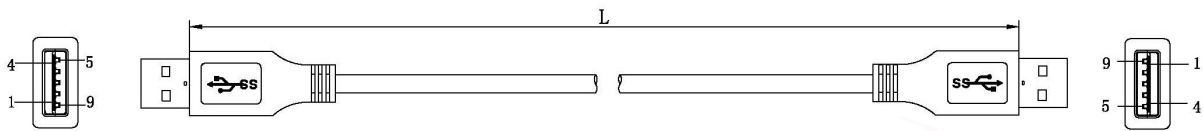

NOTES:

1. MATERIALS


- 1.1 CABLE: AWG30 PIMF * 2P (SS) + AWG30 * 1P (HS) + 2C AWG20 (POWER)
 DETAIL: (7/0.10BC*1P+7/0.10BC+FAM)*2PCS+7/0.32BC*2C+7/0.10BC*1P+
 AM+7/0.12BC+128/0.12ALM+BLACK PVC JACKET;
 OD: 5.5 ± 0.15MM

CABLE PRINTING: USB 3.0 SUPER SPEED CABLE


- 1.2 USB 3.0 A TYPE MALE: SOLDER TYPE, BLUE PBT INSULATION,
 GOLD PLATED CONTACTS, NICKEL PLATED SHELL.

- 1.3 ALL HOOD: MOLDED BLACK PVC.


2. TESTING: 100% OPEN AND SHORT TEST.
 3. PACKING: 1PC/PE BAG.
 4. ALL MATERIAL BE RoHS COMPLIANT.



PIN OUT



SHELL ——— SHELL
 (BRAID+DRAIN)



DIREKTRONIK

Direktronik AB tel. 08-52 400 700 www.direktronik.se