


DIREKTRONIK

Specification

ArticleName : XLR M/F

Brand :

Code :

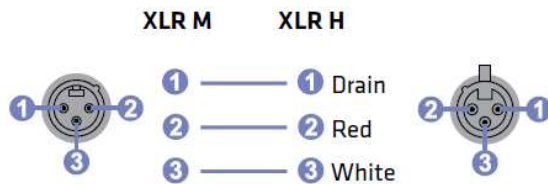

◆ Electrical	
-Contact Resistance	≤10mΩ
-Insulation Resistance	≥1.5 GΩ (Initial)
-Dielectric Strength	0.5 KVdc
◆ Mechanical	
-Insertion and Withdrawal Force	≤60N
-Lifetime	>1,000 Mating Cycles
◆ Material	
1.3pin insert(F/M)	PA6+30%GF
Contact (M)	QSn6.5-0.1
Pin(F)	Hpb59-1
Ground Contact	Stainless steel cold rolling belt
2.Bushing(F/M)	
Bush	PA6+30%GF+PVC
Boot	PVC
Chuck	ABS
3.Housing+Latch(F/M)	Zinc
4.Ring	Rubber
5.Connector:	EK 9006/BG - XLR Female 3 pins BLACK Ø4,00 mm EK 9001/BG - XLR Male 3 pins BLACK Ø4,00 mm
6.Cable/Q3-424 description	[28/0,10mm BC]*2C + S[84/0,10mm BC] OD: 6,00mm).
7.Cable printing	Q3-424 EMELEC VíasCom PROFESSIONAL LOW NOISE MICROPHONE CABLE 24AWG OFC 99,99% Black (RAL9005)
8.Jacket colour	Black (RAL9005)
◆ Plating	
1.Pin & Contact	Copper pin, golden plating pin
2.GND Contact	Tin Plating
3.Housing(F/M)	Black Plating
Latch	Nickel Plating
◆ Length	0.5m, 1m, 1.5m, 2m, 3m, 5m, 10m, 15m,20m
◆ Packing	Colour box (0.5-5m, size:14*10*1.5cm) (10-20m, size;14*13*2.2cm)
◆ Packing picture	