



PRODUCT DATASHEET

BNC STRAIGHT JACK TO JACK ADAPTOR

Item nr 20105057



images for illustration purposes only

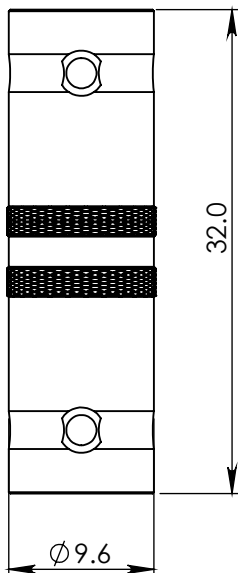

Suitable for Cables:

N/A

Connector Interface

image for illustration purposes only



Tooling

Centre Contact: N/A

Tool No: N/A

Crimp Sleeve: N/A

Tool No: N/A

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated):

Electrical Specification

Impedance: 75 Ohm

Frequency: 0 - 4 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min

Cable Retention: N/A

Mating cycles: 250

Weight: 7.50 g


FREQUENCY RESPONSE

1.0 GHz - 27.7dB

2.0 GHz - 26.6dB

3.0 GHz - 26.4dB

4.5 GHz - 18.5dB

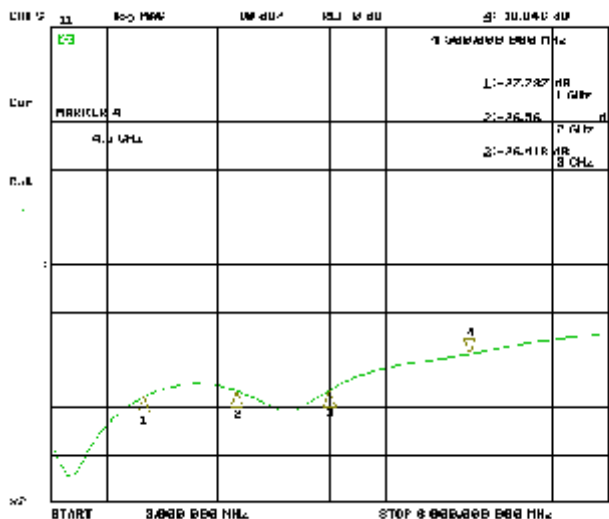

3	CENTRE CONTACT	PHOS. BRONZE	GOLD
2	BODY	BRASS	NICKEL
1	INSULATOR	PTFE	N/A
ITEM	DESCRIPTION	MATERIAL	PLATING

A4 SHEET 1 OF 1



DIMENSIONS ARE IN MILLIMETRES

REVISION : A01

NAME	SIGNATURE	DATE
DRAWN GE		27/10/2008
CHK'D IG		30/10/2008
APPV'D		

ISSUE : 0

DIREKTRONIK

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.