



MARK	DATE	DESCRIPTION	REV.	DESIGN
1	2022/02/26	変更鍍合金外形		

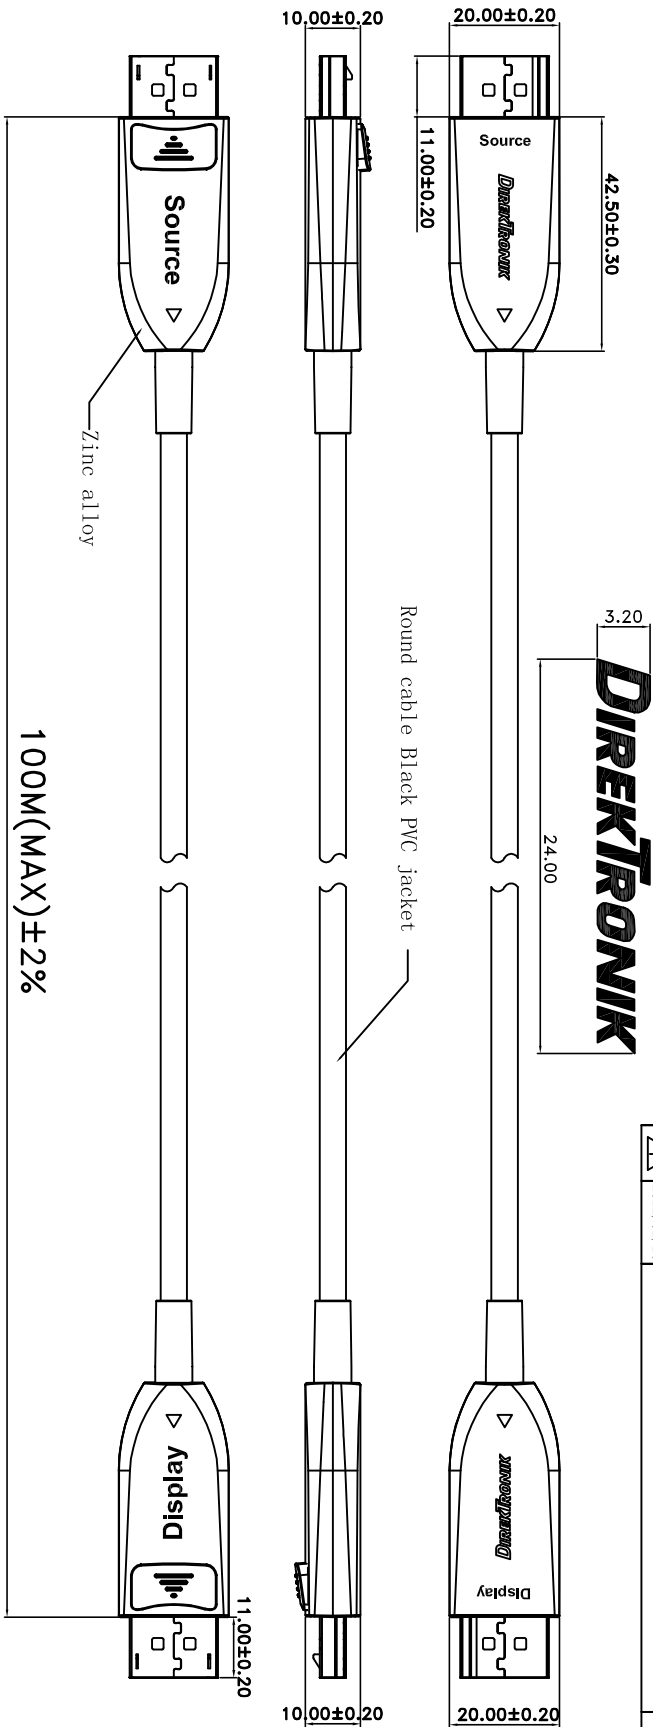

100M(MAX)±2%

**NOTE:**

- Supports computer resolutions to 8K@60Hz 4K@120Hz 4:4:4
- Plug and Play
- Compatible with DP 1.4 standard.
- Support HDCP2.2
- Self-detecting function for EDID information
- No loss of signal
- Hybrid optical cable with fiber and copper wire
- PIN gold plated, shell gold plated
- Environmental Specifications: For Indoor use only;
- Operating temperature: -40°C to 70°C
- Minimum bending radius 20mm
- Max. tension force: 100N
- 4core OM3 Multimode Fiber (high speed data) and 7core copper cable
- Round cable Black PVC jacket
- RoHS 2.0 & REACH compliant
- Packing: package 1pc reel

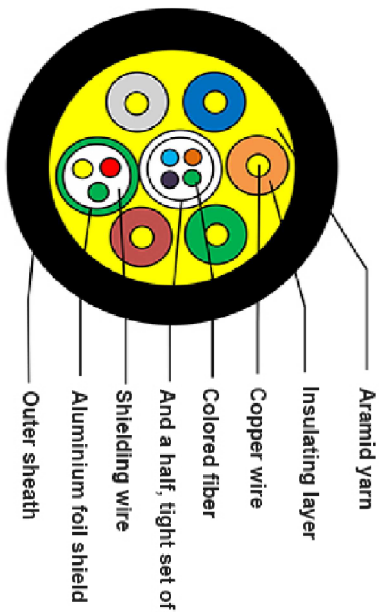

UNLESS OTHERWISE SPECIFIED TOLERANCE		OTHERWISE SPECIFIED TOLERANCE		图号	CLH	日期	品名	产品编号	单位	比例	页码	版本
ANG	TOL	DIM	TOL	制图		2022.02.26	DP 1.4 AOC		mm	1:1	1/1	01B
.X	±3.0'	.X	±0.10	审核								
.XX	±2.0'	.XX	±0.05	核准								
.XXX	±1.0'	.XXX	±0.03									