

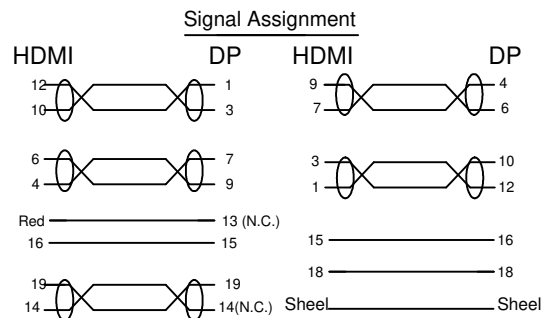


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2020/01/04	

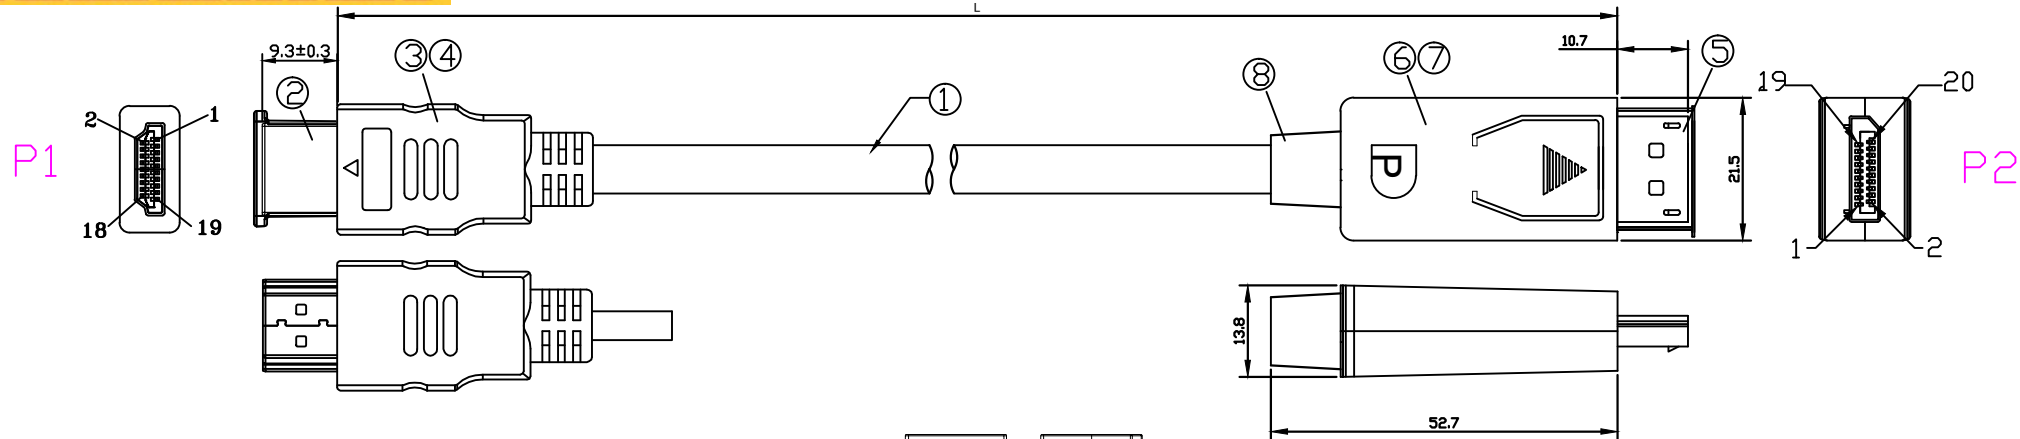


DP PCBA+PS8121E,  
1080\*1920@60Hz

## Remark:

- 100% Open/Short Test
- Conductive Resistance:5ohms MAX
- Insulation Resistance:10M ohm MIN.
- HI-POT:DC 300V/10MS.
- The product is RoHS compliant.
- Support 1080P/60Hz

Dataprodukter utöver det vanliga

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑧	SR	45P PVC, Black	1PC
⑦	Shell	Top and Bottom Shell, ABS with "D"Black	1PC
⑥	Inernal Mold	Inner Mould PE	1PC
⑤	Connector	DP male head hook + PCBA with IC(PS8121E), Gold-Plated	1PC
④	External Mold	Outer Mould 45P PVC, Black	1PC
③	Inernal Mold	Inner Mould PE	1PC
②	Connector	HDMI A PLUG PIN, Gold-Plated	1PC
①	Cable	(1/0.254BC*1P+AL+MY)*5+1/0.254*4C+AL+D:1/0.23BC+64ALB+OD5.5mm PVC, Black	



ERP NO.:		SAMPLE DWG NO.:	
DOC No.:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	DP M - HDMI M 30AWG	PAGE NO	1/1
		DATE	2020/01/04
APPROVAL		CHECKED	
		DRAWN	